

Einhell Germany AG



**STATIONARY  
TOOLS**  
2015/2016

**Einhell**  
WELL DONE.

# Einhell. Well done.

Based in Landau an der Isar in southern Germany, Einhell Germany AG is one of the world's leading suppliers of in-house developed and distributed solutions for DIY enthusiasts and trade professionals for use in the home, garden and for leisure purposes. For 50 years and in more than 40 countries, Einhell has provided professional expertise in its partnerships with retailers for the supply of hand-held power tools, stationary tools and machines including garden equipment and water technology.

With its tagline "Einhell® WELL DONE", Einhell can increasingly claim to be blazing a trail in the development of innovative new products and technologies that impress customers with their outstanding value for money.

As a company, Einhell focuses on generating sustainable international growth as well as reinforcing its position in the market by supplying „Brand Quality at the Best Price“.



## Einhell. Brand quality and service.

- Our new multi-stage quality assurance system covers everything without exception: from audits of our production facilities around the world to our complete service for the end user.
- The Einhell RED Service covering the D/A/CH markets provides fast, all-round expert assistance and comes with a 10-year parts availability guarantee.

■ German  
■ Designed  
■ Quality  
*Einhell Germany AG*



# STATIONARY TOOLS



## Woodworking technology

Drag, crosscut and mitre saws	5
Table saws	11
Stationary planer	18
Band saw	18
Scroll saws	19
Upright belt disk grinder/sander	20
Wood lathe	21
Accessories	22



## Cleaning technology

Ash vacuum cleaners	26
Wet and dry vacuum cleaners	27
High pressure cleaners	33



## Compressed air technology

Compressors	37
Compressed air accessories	45



## Tile and stone cutting

Tile cutting machines	50
Stone cutting machines	52



## Metal working technology

Bench grinder	55
Wet-dry Grinder	57
Upright belt grinder/sander	58
Metal cutting saw	59

## Service

60

Einhell Germany AG recommends accessories from



[www.kwb.eu](http://www.kwb.eu)



Note: For safe handling of the products please refer to the instructions in the operating manual.

# Cut clean through the wood.



## Andreas Sporrer

(Product trainer, Einhell Germany AG)

The wide range of Einhell bench-type circular saws and crosscut and miter saws did not make for an easy choice. Finally, though, I opted for the handy TE-SM 2131 Dual and am perfectly happy with it. Optimum performance, ideal adjustment options, clean work results - that's what I expect from a good machine. And that's what made the treehouse for my son a luxury apartment!



CROSSCUT AND MITRE SAW WITH TABLE

# TH-MS 2112 T



Mains voltage	230 V ~ 50 Hz
Rating	1200 W S1
Speed	4500 min <sup>-1</sup>
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	24
Swiveling range	-45° to +45°
Mitre cut	0° to +45° to the left
Max. cutting width	120 x 55 mm (at 90°)
Net weight   gross weight	11.0 kg   14.2 kg
Packing dimensions	420 x 300 x 400 mm
Packaging unit	1
Article number	43.003.17
EAN code	

CROSSCUT AND MITER SAW WITH TABLE

# TH-MS 2513 T



Mains voltage	230 V ~ 50 Hz
Rating	1800 W S1
Speed	4500 min <sup>-1</sup>
TCT saw blade	Ø 250 x Ø 30 mm
Number of teeth	36
Swiveling range	-45° to +45°
Mitre cut	0° to +45° to the left
Max. cutting width	130 x 75 mm (at 90°)
Net weight   gross weight	13.5 kg   15.5 kg
Packing dimensions	540 x 370 x 470 mm
Packaging unit	1
Article number	43.003.45
EAN code	



2 in 1: Crosscut saw and bench-type circular saw function



Precise angular cuts



2 in 1: Crosscut saw and bench-type circular saw function



Precise angular cuts



Variable cutting height



TCT saw blade in professional quality



Variable cutting height



TCT saw blade in professional quality

MITRE SAW

**TH-MS 2112**



Mains voltage	230 V ~ 50 Hz
Rating	1600 W S6 40%
Speed	5000 min <sup>-1</sup>
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	48
Swiveling range	-45° to +45°
Mitre cut	0° to 45° to the left
Max. cutting width	120 x 55 mm (at 90°)

Net weight   gross weight	7.4 kg   8.7 kg
Packing dimensions	480 x 320 x 290 mm
Packaging unit	1
Article number	43.002.95
EAN code	

4 006825 584929

MITRE SAW

**TH-MS 2513 L**



Mains voltage	230 V ~ 50 Hz
Rating	1600 W S1
Speed	4000 min <sup>-1</sup>
TCT saw blade	Ø 250 x Ø 30 mm
Number of teeth	48
Swiveling range	-45° to +45°
Mitre cut	0° to 45° to the left
Max. cutting width	130 x 75 mm (at 90°)

Net weight   gross weight	9.8 kg   11.1 kg
Packing dimensions	535 x 400 x 410 mm
Packaging unit	1
Article number	43.008.50
EAN code	


4 006825 592122



Precise angular cuts



Secure fastening of the workpieces

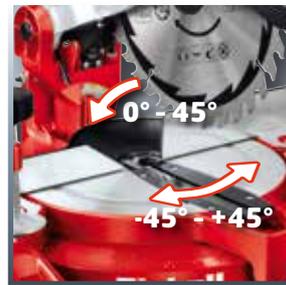

Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting



Easy saw blade change



TCT saw blade in professional quality



Secure fastening of the workpieces



TCT saw blade in professional quality

DRAG, CROSSCUT AND MITRE SAW  
**TH-SM 2131 Dual**



Mains voltage	230 V ~ 50 Hz
Rating	1800 W S2 5 min
Speed	5000 min <sup>-1</sup>
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	48
Swiveling range	-45° to +45°
Mitre cut	-45° to +45°
Max. cutting width	310 x 62 mm (at 90°)
Net weight   gross weight	11.9 kg   14.2 kg
Packing dimensions	725 x 455 x 395 mm
Packaging unit	1
Article number	43.008.35
EAN code	 4 006825 584936

DRAG, CROSSCUT AND MITRE SAW  
**TH-SM 2534 Dual**



Mains voltage	230 V ~ 50 Hz
Rating	2350 W S6 25%
Speed	4000 min <sup>-1</sup>
TCT saw blade	Ø 250 x Ø 30 mm
Number of teeth	48
Swiveling range	-45° to +45°
Mitre cut	-45° to +45°
Max. cutting width	340 x 75 mm (at 90°)
Net weight   gross weight	16.1 kg   19.5 kg
Packing dimensions	800 x 575 x 455 mm
Packaging unit	1
Article number	43.008.25
EAN code	 4 006825 584943




Integrated drag function for wide workpieces



Precise angular cuts



Integrated drag function for wide workpieces

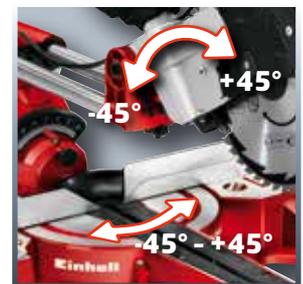

Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting



TCT saw blade in professional quality



Includes laser (mains-powered) for precise guidance while cutting



TCT saw blade in professional quality



MITRE SAW  
**TE-MS 2112 L**



DE: rating "Very good"



Mains voltage	230 V ~ 50 Hz
Rating	1400 W S6 20%
Speed	5000 min <sup>-1</sup>
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	48
Swiveling range	-47° bis +47°
Mitre cut	0° to 45° to the left
Max. cutting width	120 x 60 mm (at 90°)
Net weight   gross weight	8.7 kg   10.3 kg
Packing dimensions	540 x 380 x 340 mm
Packaging unit	1
Article number	43.008.40
EAN code	



Precise angular cuts



Includes laser and LED illumination of the cutting area (mains-powered)



Secure fastening of the workpieces



TCT saw blade in professional quality

DRAG, CROSSCUT AND MITRE SAW

**NEW!**

## TE-SM 2131 DUAL



Mains voltage	230 V - 240 V ~ 50 Hz
Rating	1600 W S6 20%
Speed	5000 min <sup>-1</sup>
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	48
Swiveling range	-47° to +47°
Mitre cut	-45° to +45°
Max. cutting width	310 x 65 mm (at 90°)

Net weight   gross weight	13.2 kg   16.1 kg
Packaging unit	830 x 490 x 330 mm
Packaging unit	1
Article number	43.008.60
EAN code	

4 006825 599527

DRAG, CROSSCUT AND MITRE SAW

**NEW!**

## TE-SM 2534 DUAL




Mains voltage	230 V - 240 V ~ 50 Hz
Rating	1800 W
Speed	5100 min <sup>-1</sup>
TCT saw blade	Ø 250 x Ø 30 mm
Number of teeth	48
Swiveling range	-47° to +47°
Mitre cut	-45° to +45°
Max. cutting width	310 x 90 mm (at 90°)

Net weight   gross weight	15.8 kg   18.3 kg
Packaging unit	905 x 360 x 605 mm
Packaging unit	1
Article number	43.008.70
EAN code	

4 006825 599534



Integrated drag function for wide workpieces

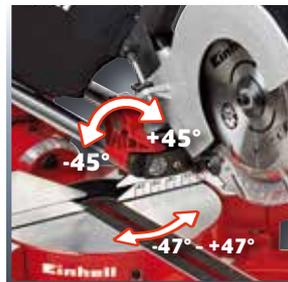

Precise angular cuts



Integrated drag function for wide workpieces



Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting



TCT saw blade in professional quality



Includes laser (mains-powered) for precise guidance while cutting



TCT saw blade in professional quality

# E STATIONARY SAWS FROM EINHELL

THE RIGHT TOOL FOR EVERY JOB!



## BENCH-TYPE CIRCULAR SAWS

The right tool for every project...

Einhell saws meet every DIY enthusiast's needs and cover an extremely wide range of applications: The Einhell range provides semi-stationary bench-type circular saws, bench-type circular saws with a base frame, format circular saws and bench-type circular saws with or without AC connection and handy accessories such as a slide and equipment for extracting dust and chips.



Bench-type circular saws with base frame

Bench-type circular saws (with or without AC connection)

Semi-stationary bench-type circular saws

Bench-type circular saw with format function

... and all with optimum features!

The large selection of Einhell bench-type circular saws has the perfect machine for any project. And all of them come with...

### Performance-optimized motors

Optimum performance for every type of saw. Delivering the power reserves needed for every project.



### Maximum work area...

...and a minimum transport size. Einhell saws go large for working and shrink for transport and storage.



### Ideal adjustment options...

...for all designated applications. Clean and safe cuts in any application.



### Dust extraction

The ability to extract dust directly at the machine with a wet and dry vacuum cleaner provides for a clean and safe workplace.



## CROSSCUT AND MITER SAWS

The right tool for every project...

Einhell crosscut saws provide impressive saw blade quality. They make the cut with ease in all DIY applications. Einhell supplies crosscut and miter saws and crosscut and miter saws with drag function that make short work of even wide workpieces.



Crosscut and miter saws

Crosscut and miter saws with drag function

... and all with optimum features!

The large selection of crosscut and miter saws with or without drag function has the right machine for everyone. And all of them come with...

### Workpiece support or X-Tend

Secure support for longer workpieces: specially shaped metal rail or Einhell's own X-Tend aluminum supports with one-handed operation.



### Angled cuts on both sides

Efficient machine ergonomics get the job done quicker and easier and that includes the Einhell dual function that comes with drag, crosscut and miter saws.



### LED light and laser

Work safely, accurately and fast - even in difficult light conditions.



### Dust bag

Clean air in the workplace - the dust bag supplied with the saw helps to create a more pleasant and healthier environment. Connections to the extractor system are always provided.



TABLE SAW  
**TH-TS 820**




Mains voltage	230 V ~ 50 Hz
Rating	800 W S2 10 min
Speed	2950 min <sup>-1</sup>
Maximum cutting height	43 mm (90°), 35 mm (45°)
TCT saw blade	Ø 200 x Ø 16 mm   20 teeth
Swiveling range	0° to 45° to the left
Bench size	500 x 335 mm
Net weight   gross weight	11.4 kg   12.5 kg
Packing dimensions	530 x 366 x 283 mm
Packaging unit	1
Article number	43.404.10
EAN code	

TABLE SAW  
**TC-TS 921**

**NEW!**




Mains voltage	230 V ~ 50 Hz
Rating	900 W S1
Speed	4500 min <sup>-1</sup>
Maximum cutting height	62 mm (90°), 36 mm (45°)
TCT saw blade	Ø 210 x Ø 30 mm   24 teeth
Swiveling range	0° to 45° to the left
Bench size	525 x 400 mm
Net weight   gross weight	13.2 kg   16.3 kg
Packing dimensions	580 x 455 x 340 mm
Packaging unit	1
Article number	43.407.35
EAN code	

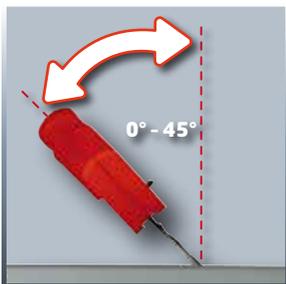

Saw blade adjustment (angle)



Parallel guide with two stop heights

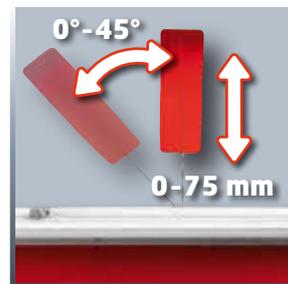

Saw blade adjustment (height and angle)



Bench extension



TCT saw blade



Chip extractor



TCT saw blade



Chip extractor

TABLE SAW  
**RT-TS 920**



Mains voltage	230 - 240 V ~ 50 Hz
Rating	900 W S1
Speed	4800 min <sup>-1</sup>
Maximum cutting height	45 mm (90°), 42 mm (45°)
TCT saw blade	Ø 205 x Ø 16 mm   24 teeth
Swiveling range	0° to 45° to the left
Bench size	525 x 400 mm
Net weight   gross weight	14.7 kg   16.3 kg
Packing dimensions	580 x 455 x 340 mm
Packaging unit	1
Article number	43.407.32
EAN code	

TABLE SAW  
**TH-TS 1525 eco**  
WITH BASE FRAME




Mains voltage	230 V ~ 50 Hz
Rating	1500 W S6 40%
Speed	5700 min <sup>-1</sup>
Maximum cutting height	75 mm (90°), 48 mm (45°)
TCT saw blade	Ø 250 x Ø 30 mm   24 teeth
Swiveling range	0° to 45° to the left
Cross stop tiltable	-60° to +60°
Bench size	640 x 446 mm
Net weight   gross weight	20.1 kg   22.4 kg
Packing dimensions	730 x 590 x 335 mm
Packaging unit	1
Article number	43.407.85
EAN code	



Saw blade adjustment (height and angle)



Parallel guide and cross stop

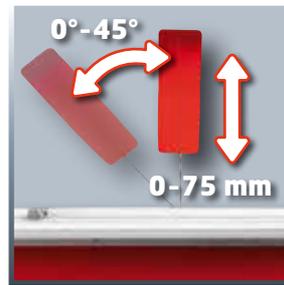

Saw blade adjustment (height and angle)



Parallel guide with eccentric clamp and additional cross stop



TCT saw blade



chip extractor



Base frame included



Chip extractor

TABLE SAW  
**TH-TS 1525 U**  
 WITH BASE FRAME

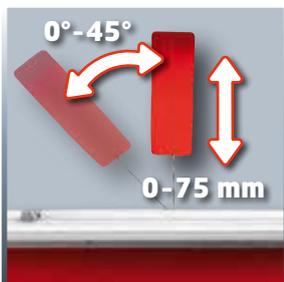


TABLE SAW  
**RT-TS 1725/1 U**  
 WITH BASE FRAME



Mains voltage	230 V ~ 50 Hz
Rating	1500 W S6 40%
Speed	5700 min <sup>-1</sup>
Maximum cutting height	75 mm (90°), 48 mm (45°)
TCT saw blade	Ø 250 x Ø 30 mm   24 teeth
Swiveling range	0° to 45° to the left
Cross stop tiltable	-60° to +60°
Bench size max.	640 x 446 (946) mm
Net weight   gross weight	22.0 kg   25.4 kg
Packing dimensions	730 x 590 x 335 mm
Packaging unit	1
Article number	43.407.90
EAN code	 4 006825 589924

Mains voltage	230 – 240 V ~ 50 Hz
Rating	1700 W S6 40%
Speed	6500 min <sup>-1</sup>
Maximum cutting height	73 mm (90°), 63 mm (45°)
TCT saw blade	Ø 250 x Ø 30 mm   24 teeth
Swiveling range	0° to 45° to the left
Cross stop tiltable	2 x 0° to 45°
Bench size max.	610 (930) x 445 (945) mm
Net weight   gross weight	27.1 kg   29.4 kg
Packing dimensions	705 x 580 x 360 mm
Packaging unit	1
Article number	43.406.47
EAN code	 4 006825 541311



Saw blade adjustment (height and angle)



Table width extension for wide workpieces



Laser for precise cutting



Bench width and length extension



Parallel guide with eccentric clamp and additional cross stop



Base frame included



Eccentric clamp



Base frame included

TABLE SAW  
**TE-TS 1825 U**  
WITH BASE FRAME



Mains voltage	230 – 240 V ~ 50 Hz
Rating	1800 W S6 40%
Speed	6000 min <sup>-1</sup>
Maximum cutting height	75 mm (90°), 53 mm (45°)
TCT saw blade	Ø 250 x Ø 30 mm   24 teeth
Swiveling range	0° to 45° to the left
Cross stop tiltable	-60° to +60°
Bench size max.	610 (930) x 445 (945) mm
Net weight   gross weight	25.3 kg   27.5 kg
Packing dimensions	730 x 590 x 360 mm
Packaging unit	1
Article number	43.405.60
EAN code	 4 006825 582444

TABLE SAW  
WITH FORMAT FUNCTION  
**TE-CC 1825 U**  
WITH BASE FRAME




Mains voltage	230 V ~ 50 Hz
Rating	1800 W S6 40%
Speed	4500 min <sup>-1</sup>
Maximum cutting height	75 mm (90°), 53 mm (45°)
TCT saw blade	Ø 250 x Ø 30 mm   48 teeth
Swiveling range	-2° to 47° to the left
Bench size max.	625 x 740 (1090) mm
Sliding table size	625 x 150 mm
Slide length	770 mm
Net weight   gross weight	27.1 kg   31.8 kg
Packing dimensions	800 x 750 x 340 mm
Packaging unit	1
Article number	43.405.50
EAN code	 4 006825 582437



2 in 1 saw blade adjustment (height and angle)



Optimized for wide and long workpieces

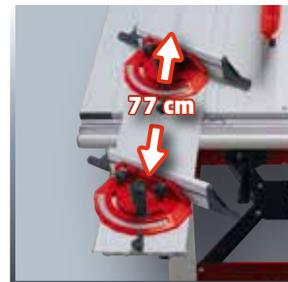

Operating slide for precise cross cuts



Bench extension with XXL stop bar



Parallel guide with eccentric clamp and additional cross stop



Extra-sturdy base frame with compensation feature for uneven floors



2 in 1 saw blade adjustment (height and angle)




Easy transport

TABLE SAW  
**RT-TS 2031 U**  
 WITH BASE FRAME




Einhell Germany AG

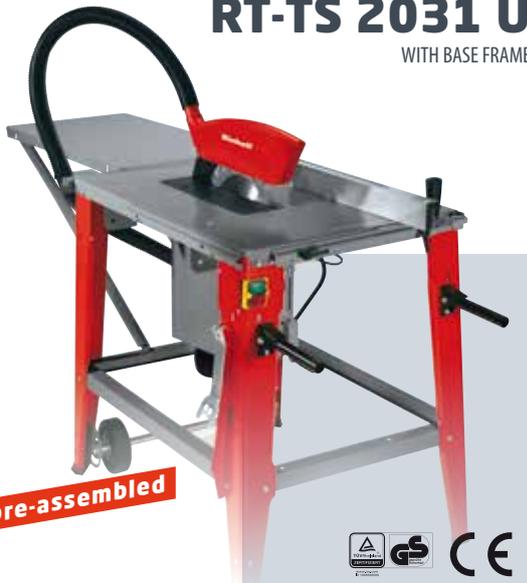

partly pre-assembled



Mains voltage	230 V ~ 50 Hz
Rating	2000 W S6 20%
Speed	2800 min <sup>-1</sup>
Maximum cutting height	83 mm (90°), 60 mm (45°)
TCT saw blade	Ø 315 x Ø 30 mm   24 teeth
Swiveling range	0° to 45°
Bench size max.	800 (1600) x 550 mm
Machine size without bench extension	900 x 570 x 1050 mm
Net weight   gross weight	50.2 kg   53.5 kg
Packing dimensions	890 x 600 x 450 mm
Packaging unit	1
Article number	43.071.53
EAN code	 4 006825 541274

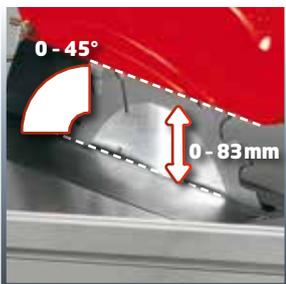

Saw blade adjustment (height and angle)



Multi-function stop



Bench length extension



Easy transport

Note: For safe handling of the products please refer to the instructions in the operating manual.

TABLE SAW

**TE-TS 2231 U**

WITH BASE FRAME

**NEW!**



partly pre-assembled



Mains voltage	230 V ~ 50 Hz
Rating	2200 W S6 20%
Speed	2800 min <sup>-1</sup>
Maximum cutting height	83 mm (90°), 50 mm (45°)
TCT saw blade	Ø 315 x Ø 30 mm   24 teeth
Swiveling range	0° to 45° to the left
Cross stop tiltable	-60° to +60°
Bench size max.	800 (1450) x 550 mm
Net weight   gross weight	45.5 kg   50.0 kg
Packing dimensions	860 x 475 x 570 mm
Packaging unit	1
Article number	43.071.56
EAN code	 4 006825 598278

TABLE SAW

**TE-TS 2831 UD**

WITH BASE FRAME AND THREE-PHASE

**NEW!**



partly pre-assembled



Mains voltage	400 V3 ~ 50 Hz
Rating	2800 W S6 (20%)
Speed	2800 min <sup>-1</sup>
Maximum cutting height	83 mm (90°), 50 mm (45°)
TCT saw blade	Ø 315 x Ø 30 mm   24 teeth
Swiveling range	0° to 45° to the left
Cross stop tiltable	-60° to +60°
Bench size max.	800 (1350) x 550 mm
Net weight   gross weight	45.5 kg   50.0 kg
Packing dimensions	860 x 475 x 570 mm
Packaging unit	1
Article number	43.071.44
EAN code	 4 006825 598261



Long-lasting induction motor



Robust base frame



Long-lasting induction motor with AC connection



Robust base frame



Easy transport



Complete with kwb branded carbide saw blade



Easy transport



Complete with kwb branded carbide saw blade

# SLIDE



## THE SPECIAL SAW BLADE FROM KWB

- Brand quality
- For the optimum in longitudinal cuts
- Special tooth geometry produces ultra-precise cuts
- Laser production processes support the highest standards of workmanship
- Top quality materials guarantee a long service life and a high standard of cut
- Standard accessory for TE-TS 2231 U and TE-TS 2831 UD




Slide length	730 mm
Suitable accessory for	TE-TS 2231 U, TE-TS 2831 UD, RT-TS 2031 U
Net weight   gross weight	6.2 kg   7.5 kg
Packing dimensions	990 x 280 x 165 mm
Packaging unit	1
Article number	43.106.25
EAN code	 4 006825 598285



Expands the range of options and precision of bench-type circular saws



Easy assembly

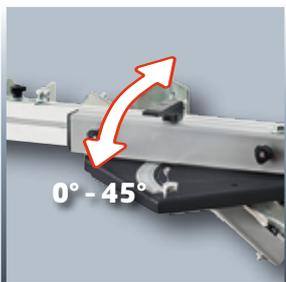

Cross stop with angle setting from 0° to 45°



Integrated limit stop for simple repeat work

STATIONARY PLANER  
**TH-SP 204**



Mains voltage	230 V ~ 50 Hz
Rating	1280 W
Plane blade speed	9200 min <sup>-1</sup>
Max. material removal	3 mm
Max. working width	204 mm
Max. height at thickness opening	120 mm
Feed speed	8 m/min
Max. angle of the parallel guide	45°
Net weight   gross weight	27.5 kg   30.2 kg
Packing dimensions	850 x 450 x 440 mm
Packaging unit	1
Article number	44.199.50
EAN code	


BAND SAW  
**TC-SB 200**



Mains voltage	230 V ~ 50 Hz
Rating	250 W S2 15 min
Speed	1400 min <sup>-1</sup>
Blade speed	900 m/min
Bandsaw blade	1400 x 8 mm   6 teeth /25.4 mm
Maximum cutting height	80 mm (90°)
Reach	200 mm
Swiveling range	-4° bis 46°
Table size	300 x 300 mm
Net weight   gross weight	15.4 kg   17.6 kg
Packing dimensions	350 x 720 x 270 mm
Packaging unit	1
Article number	43.080.15
EAN code	



Sturdy, solid construction

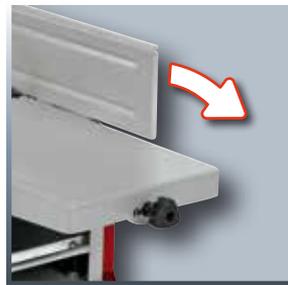

Surface plane with stop for chamfering



Infinitely tilting saw table



Height adjustment of blade bearings for greater sawing accuracy



Thickness planer with pull-out workpiece support



Dust extraction 100 mm



Parallel stop guide



Connection for vacuum extraction system 36 mm

SCROLL SAW  
**TH-SS 405 E**




Mains voltage	230 V ~ 50 Hz
Rating	120 W S6 20%
Speed	400 – 1600 min <sup>-1</sup>
Stroke height	21 mm
Saw blade	127 mm
Cutting height max.	57 mm (90°)
Throat depth	406 mm
Table tiltable	0° to 45°
Bench size	413,5 x 253 mm
Net weight   gross weight	13.0 kg   14.4 kg
Packing dimensions	640 x 310 x 333 mm
Packaging unit	1
Article number	43.090.40
EAN code	

SCROLL SAW  
**TH-SS 405 EL**



Mains voltage	230 V ~ 50 Hz
Rating	120 W S6 20%
Speed	400 – 1600 min <sup>-1</sup>
Stroke height	21 mm
Saw blade	127 mm
Cutting height max.	57 mm (90°)
Throat depth	406 mm
Table tiltable	0° to 45°
Bench size	413,5 x 253 mm
Net weight   gross weight	13.5 kg   15.0 kg
Packing dimensions	640 x 310 x 333 mm
Packaging unit	1
Article number	43.090.50
EAN code	

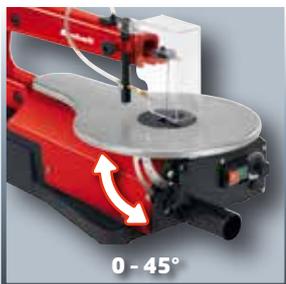

Infinitely tilting machine table



Clear view thanks to chip blower



Infinitely tilting machine table




Optimum view thanks to light and blow-off device



Adapter for fret saw blades



Safe operation even on filligree workpieces

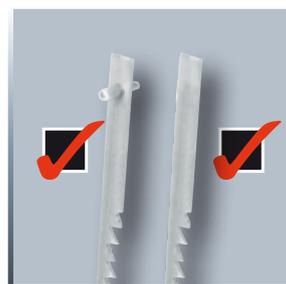

Adapter for fret saw blades



Device for blade tensioning and replacement without tools

UPRIGHT BELT GRINDER/SANDER

**TH-US 240**

**NEW!**



Mains voltage	230 V ~ 50 Hz
Rating	240 W S2 30 min
Speed	2950 min <sup>-1</sup>
Grinding wheel dimensions	Ø 150 x Ø 12.7 x 20 mm
Grinding/sanding belt dimensions	50 x 686 mm
Belt speed	900 m/min.
Net weight   gross weight	7.3 kg   8.2 kg
Packing dimensions	410 x 340 x 215 mm
Packaging unit	1
Article number	44.661.50
EAN code	 4 006825 595789

UPRIGHT BELT DISK GRINDER/SANDER

**TC-US 400**

**NEW!**



Mains voltage	230 V ~ 50 Hz
Rating	375 W S2 30 min
Speed	1450 min <sup>-1</sup>
Grinding wheel	Ø 150 mm
Grinding /sanding belt	915 x 100 mm
Table incline	0° to 45°
Cross stop swivel range	-60° to +60°
Net weight   gross weight	16.9 kg   18.0 kg
Packing dimensions	500 x 255 x 300 mm
Packaging unit	1
Article number	44.192.55
EAN code	 4 006825 601930



2 tool supports ensure maximum variability



Adjustable spark guard window for safety when working



Swiveling belt grinding/sanding device with workpiece stop




Disk grinder/sander with Velcro fastening system




Rubber feet for safe, low-vibration stability



Sturdy, compact design in metal

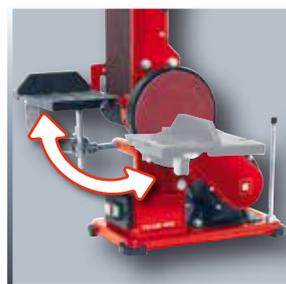

Tilting and swiveling aluminum support table, versatile usable

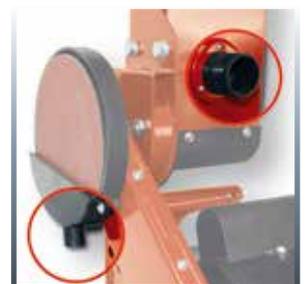

Connection for dust extractor for a clean workplace



Einhell Germany AG

WOOD LATHE

# TC-WW 1000

**NEW!**



Mains voltage	230 V ~ 50 Hz
Rating	350 W S2 15 min
Max. lathe diameter	356 mm
Tip width	1000 mm
Spindle speed	810 / 1180 / 1700 / 2480 min <sup>-1</sup>
Net weight   gross weight	22.5 kg   24.2 kg
Packing dimensions	880 x 220 x 400 mm
Packaging unit	1
Article number	43.121.05
EAN code	 4 006825 600438



Four adjustable speed settings



Tailstock with live spindle tip for securing and centering the workpiece, tool-free adjustable



Robust, tool-free adjustable tool support



Front end driver and face plate for many different applications



Note: For safe handling of the products please refer to the instructions in the operating manual.



# BASE FRAME E-STAND


**multifunctional**



<b>Assembly width</b>	340 – 445 mm
<b>Assembly depth</b>	max. 410 mm
<b>Working height</b>	81 cm
<b>Can be combined with</b>	TE-SM 2131 Dual, TE-SM 2534 Dual, TH-MS 2112, TH-MS 2513 L, TE-MS 2112 L, TH-SM 2131 Dual, TH-SM 2534 Dual
<b>Net weight   gross weight</b>	10.4 kg   11.4 kg
<b>Packing dimensions</b>	795 x 340 x 120 mm
<b>Packaging unit</b>	1
<b>Article number</b>	43.106.20
<b>EAN code</b>	 4 006825 584974



One height adjustable foot for level control

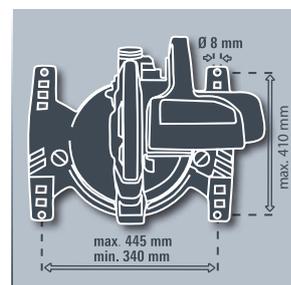

Can be used for semi-stationary machines of various sizes



Aluminium assembly rail with sliding blocks



Sturdy X-strutting apart

Note: For safe handling of the products please refer to the instructions in the operating manual.

CHIP AND DUST EXTRACTION SYSTEM

**RT-VE 550 A**



**with automatic socket**



Mains voltage	230 – 240 V ~ 50 Hz
Rating	550 W S1
Speed	2850 min <sup>-1</sup>
Debris bag volume	65 l
Air capacity	1150 m <sup>3</sup> /h
Vacuum	max. 1600 Pa
Dust extraction connector	Ø 100 mm / Ø 36 mm
Hose length	2.5 m
Net weight   gross weight	19.6 kg   23.0 kg
Packing dimensions	895 x 540 x 440 mm
Packaging unit	1
Article number	43.041.50
EAN code	

**can be combined with**



Mitre saws



Table saws



Bandsaws



Stationary planes

**TCT SAW BLADE**

for RT-TS 920  
48 teeth | Ø 205 x Ø 16 mm



Art. No. 45.020.33  
PU 1  
EAN code



**TCT SAW BLADE KIT**

for RT-TS 1221, RT-SM 305 L,  
TE-MS 2112 L, TH-SM 2131 Dual,  
TE-SM 2131 Dual  
Ø 210 x Ø 30 mm,  
1x 24 teeth, 1x 48 teeth, 1x 60 teeth



Art. No. 45.021.32  
PU 1  
EAN code



**TCT SAW BLADE-SET**

for RT-SM 305 L, TH-MS 2112,  
TE-MS 2112 L, TH-SM 2131 Dual,  
TE-SM 2131 Dual, RT-TS 1221  
24 teeth | Ø 210 x Ø 30 x 2.8 mm



Art. No. 45.020.48  
PU 1  
EAN code



**TCT SAW BLADE**

for RT-SM 305 L, TH-MS 2112,  
TE-MS 2112 L, TH-SM 2131 Dual,  
TE-SM 2131 Dual, RT-TS 1221  
48 teeth | Ø 210 x Ø 30



Art. No. 45.020.34  
PU 1  
EAN code



**TCT SAW BLADE**

for RT-SM 430 U, TH-MS 2513 L,  
TH-SM 2534 Dual, TE-SM 2534 Dual,  
TH-TS 1525 U, RT-TS 1725/1 U,  
TE-TS 1825 U, TE-CC 1825 U  
24 teeth | Ø 250 x Ø 30 mm



Art. No. 43.111.10  
PU 1  
EAN code



**TCT SAW BLADE**

for RT-SM 430 U, TH-MS 2513 L,  
TH-SM 2534 Dual, TE-SM 2534 Dual,  
TH-TS 1525 U, RT-TS 1725/1 U,  
TE-TS 1825 U, TE-CC 1825 U  
48 teeth | Ø 250 x Ø 30 mm



Art. No. 43.111.11  
PU 1  
EAN code



**TCT SAW BLADE**

for RT-SM 430 U, TH-MS 2513 L,  
TH-SM 2534 Dual, TE-SM 2534 Dual,  
TH-TS 1525 U, RT-TS 1725/1 U,  
TE-TS 1825 U, TE-CC 1825 U  
60 teeth | Ø 250 x Ø 30 mm



Art. No. 43.111.13  
PU 1  
EAN code



### TCT SAW BLADE KIT

for RT-TS 1725 U, RT-TS 1825 U,  
TH-TS 1525 U, TH-TS 1525 ECO  
Ø 250 x Ø 30 mm,  
1x 24 teeth, 1x 48 teeth, 1x 60 teeth



Art. No. 45.021.33

PU 1

EAN code



4 006825 534276

### TCT SAW BLADE

for RT-TS 2031 U, RT-TS 2231 UD,  
TE-TS 2231 U, TE-TS 2831 UD,  
RT-CC 315 U  
40 teeth | Ø 315 x Ø 30 mm



Art. No. 45.020.11

PU 1

EAN code



4 006825 456295

### PROFESSIONAL TURNING TOOL SET

5-part, flat and round nose chisel,  
gouge chisel, round and pointed  
chisel



Art. No. 43.112.00

PU 1

EAN code



4 006825 431551

### SAW BAND

for TH-SB 200, TC-SB 200  
1400 x 6.4 mm  
6 teeth / 25 mm



Art. No. 45.061.56

PU 1

EAN code



4 006825 508116

### SAW BLADE KIT

for TH-SS 405 E, TH-SS 405 EL  
5 saw blades



Art. No. 45.062.00

PU 1

EAN code



4 006825 453928

### SPARE BLADE

for TH-SP 204



Art. No. 43.113.10

PU 1

EAN code



4 006825 598018

### VACUUM ADAPTER SET

for TH-TS 1525 U, TE-TS 1825 U,  
TH-TS 1525 U, TH-TS 1525 ECO,  
TE-CC 1825 U



Art. No. 43.106.30

PU 1

EAN code



4 006825 587715

### GRINDING/ SANDING BELT SET

for TH-US 240  
50 x 686 mm, 5 pieces



Art. No. 44.198.09

PU 1

EAN code



4 006825 565010

### GRINDING/ SANDING BELT SET

for TC-US 400  
100 x 914 mm, 3 pieces



Art. No. 44.198.30

PU 1

EAN code



4 006825 443783

### SANDPAPER SET

for TC-US 400  
150 mm, Velcro, 3 pieces



Art. No. 44.198.45

PU 1

EAN code



4 006825 529036

Further accessories from



www.kwb.eu

**E** CLEANING SYSTEMS

**They suck up everything -  
except the money  
from your wallet!!**



**Anja Herner**

(Intern. Product Management,  
Einhell Germany AG)

It used to be a real torture going round with my household vacuum cleaner, but now I'm almost professional standard. My Einhell wet and dry vacuum cleaner is ideal for work outside. And if the washing machine starts to leak inside, the Einhell vacuum cleaner gets rid of that as well, without making a fuss. In the TE-VC 1925 SA I've got a real all-rounder in the house!

ASH VACUUM CLEANER  
**TH-VC 1318**



Mains voltage	230 V ~ 50 Hz
Rating	500 W S1
Suction power	130 mbar
Suction hose length	1.0 m
Tank volume	18 l
Net weight   gross weight	2.9 kg   3.7 kg
Packing dimensions	325 x 310 x 375 mm
Packaging unit	1
Article number	23.516.22
EAN code	

ASH VACUUM CLEANER  
**TH-VC 1425**



Mains voltage	230 V ~ 50 Hz
Rating	700 W S1
Suction power	140 mbar
Suction hose length	1.0 m
Tank volume	25 l
Net weight   gross weight	3.8 kg   4.9 kg
Packing dimensions	328 x 330 x 490 mm
Packaging unit	1
Article number	23.516.31
EAN code	



Carrying handle




Fine filter



Wheels




Fine filter

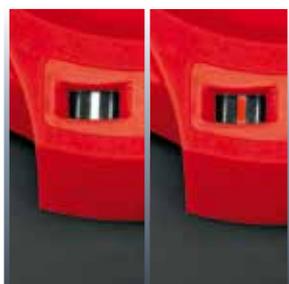

Level indicator



Cable rewind

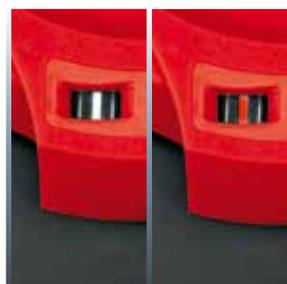

Level indicator



Cable rewind

# TC-VC 1812 S

# TH-VC 1815

**NEW!**



Mains voltage	220 – 240 V ~ 50 Hz
Rating	1250 W S1
Suction power	180 mbar
Suction hose length	1.5 m
Suction hose diameter	36 mm
Tank volume	12 l
Net weight   gross weight	3.5 kg   4.2 kg
Packing dimensions	285 x 285 x 420 mm
Packaging unit	1
Article number	23.423.70
EAN code	



Mains voltage	230 V ~ 50 Hz
Rating	1250 W S1
Suction power	180 mbar
Suction hose length	1.5 m
Suction hose diameter	36 mm
Tank volume	15 l
Noise level	80 dB(A)
Net weight   gross weight	4.2 kg   5.0 kg
Packing dimensions	330 x 330 x 440 mm
Packaging unit	1
Article number	23.402.90
EAN code	



Practical cable holder



Blow connector




Practical cable holder



Blow connector



Accessory mount

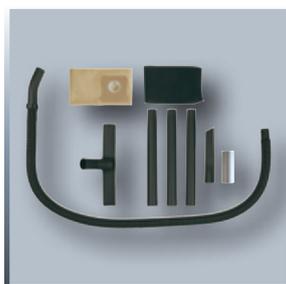

Comprehensive range of accessories



Accessory mount



Comprehensive range of accessories



WET AND DRY VACUUM CLEANER

# TH-VC 1820/1 S



Mains voltage	220 – 240 V ~ 50 Hz
Rating	1250 W S1
Suction power	180 mbar
Suction hose length	1.5 m
Suction hose diameter	36 mm
Tank volume	20 l
Noise level	82 dB(A)
Net weight   gross weight	5.3 kg   6.5 kg
Packing dimensions	320 x 325 x 460 mm
Packaging unit	1
Article number	23.422.10
EAN code	 4 006825 584653




Practical cable holder



Blow connector



Accessory mount

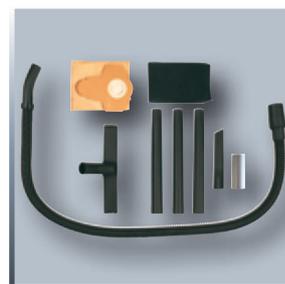

Comprehensive range of accessories

Note: For safe handling of the products please refer to the instructions in the operating manual.

WET AND DRY VACUUM CLEANER WITH ASH FILTER

## TH-VC 1820 S KIT



EDELSTAHL®  
**Rost  
frei**  
STAINLESS STEEL



Mains voltage	230 V ~ 50 Hz
Rating	1250 W S1
Suction power	180 mbar
Suction hose length	1.5 m (vacuum cleaner) / 1 m (filter)
Suction hose diameter	36 mm
Tank volume	20 l (vacuum cleaner) / 12 l (filter)
Noise level	80 dB(A)

Net weight   gross weight	6.3 kg   7.4 kg
Packing dimensions	323 x 333 x 452 mm
Packaging unit	1
Article number	23.421.75
EAN code	



WET AND DRY VACUUM CLEANER

## TH-VC 1930 SA



EDELSTAHL®  
**Rost  
frei**  
STAINLESS STEEL



Mains voltage	230 V ~ 50 Hz
Rating	1500 W S1
Suction power	190 mbar
Automatic socket outlet max.	2000 W
Suction hose length	2.5 m
Suction hose diameter	36 mm
Tank volume	30 l
Noise level	80 dB(A)

Net weight   gross weight	6.8 kg   8.6 kg
Packing dimensions	400 x 390 x 550 mm
Packaging unit	1
Article number	23.421.90
EAN code	



Practical cable holder



Blow connector



Accessory mount



Blow connector



Accessory mount



Comprehensive range of accessories



Water drain screw



Comprehensive range of accessories

WET AND DRY VACUUM CLEANER

# TE-VC 1820



Mains voltage	230 V ~ 50 Hz
Rating	750 W S1
Suction power	180 mbar
Suction hose length	2.5 m
Suction hose diameter	36 mm
Tank volume	20 l
Noise level	70 dB(A)
Net weight   gross weight	7.7 kg   9.2 kg
Packing dimensions	355 x 364 x 524 mm
Packaging unit	1
Article number	23.423.41
EAN code	

WET AND DRY VACUUM CLEANER

# TE-VC 1925 SA



Mains voltage	230 V ~ 50 Hz
Rating	800 W S1
Suction power	190 mbar
Automatic socket outlet max.	2600 W
Suction hose length	3.0 m
Suction hose diameter	36 mm
Tank volume	25 l
Noise level	72 dB(A)
Net weight   gross weight	9.7 kg   11.6 kg
Packing dimensions	386 x 472 x 561 mm
Packaging unit	1
Article number	23.423.54
EAN code	



Practical cable holder



Blow connector




Blow connector



Water drain screw




Accessory mount



Comprehensive range of accessories



Accessory mount



Comprehensive range of accessories

WET AND DRY VACUUM CLEANER

# TE-VC 2230 SA



incl. synchronous start socket

HIGH QUALITY COMPONENTS  
**EXTREME DURABILITY**



HEIMWERKER

TEST.DE

Einheit TE-VC 2230 SA  
Energieklasse

HEIMWERKER  
Praxis Einsteigerklasse  
TESTSIEGER

DE: Test winner

DE: Price / performance "Very Good"



Einhell Germany AG

Mains voltage	230 V ~ 50 Hz
Rating	1150 W S1
Suction power	220 mbar
Automatic socket outlet max.	2250 W
Suction hose length	3.0 m
Suction hose diameter	36 mm
Tank volume	30 l
Noise level	74 dB(A)

Net weight | gross weight 10.2 kg | 13.1 kg

Packing dimensions 468 x 384 x 630 mm

Packaging unit 1

Article number 23.423.63

EAN code



Trolley function



Accessory mount



Water drain screw



Comprehensive range of accessories



## ECO-POWER

### Technical know-how for the well-being of our environment

Each of us is responsible for the environment in which we live. With know-how and technology we want to make efficient use of energy. ECO Power stands for the use of efficient technology. We exploit every possibility for appreciably improving the ratio of energy input and yield in all our products.

- ECO-Power stands for:**
- Optimised energy efficiency – high performance with low energy consumption
  - Intelligent, technically sophisticated product development
  - High-quality components
  - Well-conceived product design

- Extreme Durability:**
- High-quality components
  - First-class workmanship
  - Long life – guaranteed!

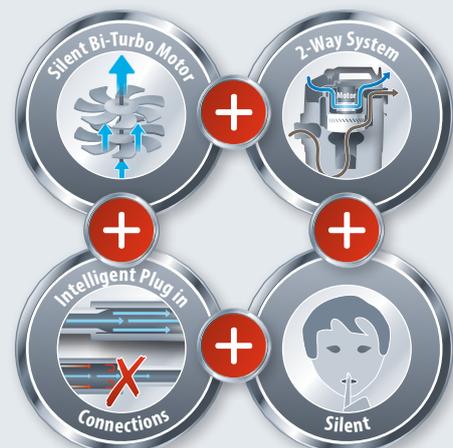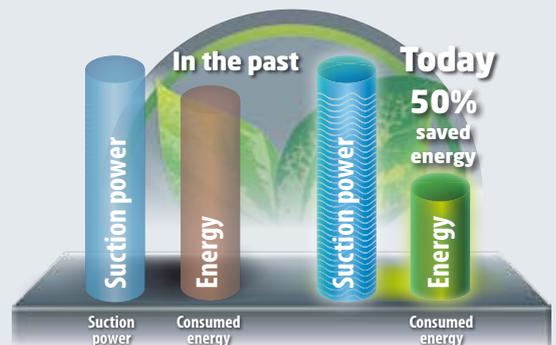

### FINE ASH FILTER

for household vacuum cleaners  
18 l



Art. No. 23.516.12

PU 1

EAN code



4 006825 548938

### ASH FILTER

for wet and dry vacuum cleaners  
12 l



Art. No. 23.516.06

PU 1

EAN code



4 006825 578041

### PLEATED FILTER

for TE-VC 1820



Art. No. 23.511.10

PU 1

EAN code



4 006825 231090

### PLEATED FILTER

for TE-VC 1820, TE-VC 1925 SA,  
TE-VC 2230 SA, TH-VC 1815,  
TH-VC 1820 S, TH-VC 1820/1 S,  
TH-VC 1930 SA



Art. No. 23.511.13

PU 1

EAN code



4 006825 566512

### PAPER FILTER SET

10 pieces



Art. No. 23.511.00

PU 1

EAN code



4 006825 231083

### FOAM FILTERS

for wet vacuuming  
Pack content 10 pieces



Art. No. 23.511.30

PU 1

EAN code



4 006825 236132

### FABRIC FILTER

for universal use



Art. No. 23.511.40

PU 1

EAN code



4 006825 231151

### DIRT BAG

20 l capacity  
Pack content 5 bags



Art. No. 23.511.52

PU 1

EAN code



4 006825 236040

### DIRT BAG

25 l capacity  
Pack content 5 bags



Art. No. 23.511.50

PU 1

EAN code



4 006825 231281

### DIRT BAG

30 l capacity  
Pack content 5 bags



Art. No. 23.511.70

PU 1

EAN code



4 006825 528763

### DIRT BAG KIT

for TC-VC 1812 S  
12 l capacity  
Pack content 5 bags

**NEW!**



Art. No. 23.511.59

PU 1

EAN code



4 006825 606065

### EXTENSION HOSE

Ø 36 mm,  
with 4 connection adapters



Art. No. 23.620.00

PU 5

EAN code



4 006825 543018

### VACUUM CLEANER ACCESSORY SET

for TH-VC 1815, TH-VC 1820/1 S,  
TH-VC 1930 SA, TE-VC 1820,  
TE-VC 1925 SA, TE-VC 2230 SA  
Ø 36 mm, 5 pieces

**NEW!**



Art. No. 23.620.10

PU 1

EAN code



4 006825 604290



HIGH PRESSURE CLEANER

# TC-HP 1334

**NEW !**

**incl. Easy pack**



Mains voltage	220 V – 240 V ~ 50 Hz
Rating	1300 W S1
Max. Working pressure	100 bar
Delivery rate	340 l/h
Range	3 m hose + 5 m power cable
Accessories	Easy pack
Net weight   gross weight	5.3 kg   5.8 kg
Packing dimensions	250 x 210 x 470 mm
Packaging unit	1
Article number	41.407.10
EAN code	 4 006825 602791



The featherweight: portable and ideal for mobile use



Practical: lance holder, hose and cable winder



With Jet-Click separator – for easy attachment of the nozzles to the device



Practical, additional cable holder

Note: For safe handling of the products please refer to the instructions in the operating manual.



## HIGH PRESSURE CLEANER TC-HP 1538 PC

incl. Easy pack  
+ Basic pack



Mains voltage	220 – 240 V ~ 50 Hz
Rating	1500 W S1
Max. Working pressure	110 bar
Delivery rate	380 l/h
Range	5 m hose + 5 m power cable
Accessories	Easy pack + Basic pack
Net weight   gross weight	8.3 kg   9.3 kg
Packing dimensions	325 x 310 x 635 mm
Packaging unit	1
Article number	41.407.20
EAN code	



## HIGH PRESSURE CLEANER TC-HP 2042 PC

inkl. Easy Paket  
+ Basic Paket



Mains voltage	220 – 240 V ~ 50 Hz
Rating	2000 W S1
Max. Working pressure	150 bar
Delivery rate	420 l/h
Range	6 m hose + 5 m power cable
Accessories	Easy pack + Basic pack
Net weight   gross weight	9.0 kg   10.0 kg
Packing dimensions	325 x 310 x 635 mm
Packaging unit	1
Article number	41.407.30
EAN code	



Handle and sturdy wheels ensure maximum mobility



Practical: lance holder, hose and cable winder



Handle and sturdy wheels ensure maximum mobility



Practical: lance holder, hose and cable winder



With Jet-Click separator – for easy attachment of the nozzles to the device



Detachable hose ensures maximum flexibility



With Jet-Click separator – for easy attachment of the nozzles to the device



Detachable hose ensures maximum flexibility

# PRESSURE CLEANER

## Accessories with system

Einhell Germany AG

### Product range overview



### Easy pack - included with all pressure cleaners



Hose



Pivoted gun



Lance



Rotating nozzle



Spray container

### Basic pack - included with selected pressure cleaners



Spot/wide jet nozzle



Terrace cleaner

### Extra accessories - also available

**NEW!**



**HPH 6**  
Extension hose  
(6 m)

1

41.440.06



**HPWB 17**  
Washing brush  
(17 cm wide)

1

41.440.08



**HPRB 15**  
Rotating washing brush  
(Ø 15 cm)

1

41.440.07



**HPAN 90**  
Angle nozzle  
(90°)

1

41.405.64



Model

Packaging unit

Article number

EAN code

**Einhell compressors bring a lot of pressure to bear - and on prices as well.**



**Daniel Protschka**  
(Techn. Product Manager,  
Einhell Germany AG)

As a product manager, I am of course extremely conscious of quality. I've now set up a workshop at home and got the Einhell compressor for it – perfect! With 8 bar and a tank volume of 24 l, it delivers enough power for all the work that comes up, but doesn't take up too much space. I'm now the greatest for my nieces as well, because no one can blow up balloons as fast as I can!

OIL-FREE COMPRESSOR  
**TH-AC 190 Kit**

OIL-FREE COMPRESSOR  
**TH-AC 190/6 OF**



Mains voltage	220 – 240 V ~ 50 Hz
Rating	1100 W S3 15%
Intake capacity	190 l/min
Output	at 0 bar: 165 l/min at 4 bar: 83 l/min at 7 bar: 55 l/min
Speed	15000 min <sup>-1</sup>
Drehzahl Pumpe	3450 min <sup>-1</sup>
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight   gross weight	5.8 kg   6.4 kg
Packing dimensions	385 x 150 x 400 mm
Packaging unit	1
Article number	40.205.36
EAN code	 4 006825 597257

Mains voltage	230 V ~ 50 Hz
Rating	1100 W S3 25%
Intake capacity	185 l/min
Output	at 0 bar: 139 l/min at 4 bar: 77 l/min at 7 bar: 60 l/min
Tank capacity	6 l
Speed	4000 min <sup>-1</sup>
Drehzahl Pumpe	3550 min <sup>-1</sup>
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight   gross weight	9.2 kg   10.6 kg
Packing dimensions	352 x 312 x 365 mm
Packaging unit	1
Article number	40.204.95
EAN code	 4 006825 592184



Maintenance-free operation



Ergonomic design for easy transport



Maintenance-free motor



Mobile compressor with compressed air storage



Space saving storing



Light and compact construction



Ergonomic design for easy transport



Cable rewind

OIL-FREE COMPRESSOR  
**TH-AC 200/24 OF**



Mains voltage	230 V ~ 50 Hz
Rating	1100 W S1
Intake capacity	140 l/min
Output	at 0 bar: 110 l/min at 4 bar: 70 l/min at 7 bar: 45 l/min
Tank capacity	24 l
Speed	2850 min <sup>-1</sup>
Drehzahl Pumpe	2850 min <sup>-1</sup>
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight   gross weight	19.5 kg   21.0 kg
Packing dimensions	575 x 270 x 605 mm
Packaging unit	1
Article number	40.205.15
EAN code	 4 006825 595925

COMPRESSOR  
**TC-AC 190/24**

**NEW!**



Mains voltage	230 V ~ 50 Hz
Rating	1500 W S2 15 min
Intake capacity	160 l/min
Output	at 0 bar: 98 l/min at 4 bar: 76 l/min at 7 bar: 60 l/min
Tank capacity	24 l
Speed	2850 min <sup>-1</sup>
Drehzahl Pumpe	2850 min <sup>-1</sup>
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight   gross weight	19.5 kg   21.1 kg
Packing dimensions	585 x 605 x 270 mm
Packaging unit	1
Article number	40.073.35
EAN code	 4 006825 604504



Maintenance-free motor



Numerous applications up to 8 bar




Oil lubrication contributes to long life



Numerous applications up to 8 bar



Big wheels and holder for easy transport

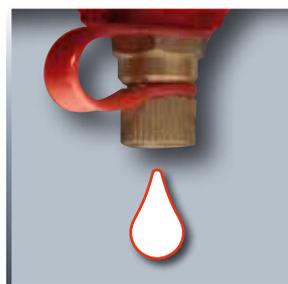

User-friendly drain screw



Big wheels and holder for easy transport



User-friendly drain screw

OIL-FREE COMPRESSOR  
**TH-AC 200/40 OF**



Mains voltage	230 V ~ 50 Hz
Rating	1100 W S1
Intake capacity	140 l/min
Output	at 0 bar: 110 l/min at 4 bar: 70 l/min at 7 bar: 45 l/min
Tank capacity	40 l
Speed	2850 min <sup>-1</sup>
Drehzahl Pumpe	2850 min <sup>-1</sup>
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight   gross weight	23.0 kg   25.0 kg
Packing dimensions	680 x 320 x 655 mm
Packaging unit	1
Article number	40.205.16
EAN code	 4 006825 595963



Maintenance-free motor



Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw



Einhell Germany AG

Note: For safe handling of the products please refer to the instructions in the operating manual.

OIL-FREE COMPRESSOR  
**TH-AC 200/30 OF**



Mains voltage	230 V ~ 50 Hz
Rating	1000 W S3 25%
Intake capacity	200 l/min
Output	at 0 bar: 165 l/min at 4 bar: 83 l/min at 7 bar: 60 l/min
Tank capacity	30 l
Speed	15000 min <sup>-1</sup>
Pump speed	3550 min <sup>-1</sup>
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight   gross weight	18.1 kg   19.6 kg
Packing dimensions	372 x 332 x 795 mm
Packaging unit	1
Article number	40.103.94
EAN code	

OIL-FREE COMPRESSOR  
**TH-AC 240/50/10 OF**

AIR +25%  
POWER 10 bar



Mains voltage	230 V ~ 50 Hz
Rating	1500 W S3 25%
Intake capacity	240 l/min
Output	at 0 bar: 173 l/min at 4 bar: 107 l/min at 7 bar: 76 l/min
Tank capacity	50 l
Speed	18000 min <sup>-1</sup>
Pump speed	4000 min <sup>-1</sup>
Operating pressure	max. 10 bar
Number of cylinders	1
Net weight   gross weight	22.3 kg   24.6 kg
Packing dimensions	372 x 347 x 875 mm
Packaging unit	1
Article number	40.103.93
EAN code	



Maintenance-free motor



Numerous applications up to 8 bar



Maintenance-free motor



Numerous applications up to 10 bar



Big wheels and holder for easy transport



Compact, space-saving design



Big wheels and holder for easy transport



Compact, space-saving design

COMPRESSOR  
**TE-AC 230/24**



Mains voltage	230 V ~ 50 Hz
Rating	1500 W S1
Intake capacity	230 l/min
Output	at 0 bar: 132 l/min at 4 bar: 102 l/min at 7 bar: 83 l/min
Tank capacity	24 l
Speed	2850 min <sup>-1</sup>
Pump speed	2850 min <sup>-1</sup>
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight   gross weight	22.9 kg   25.7 kg
Packing dimensions	590 x 280 x 630 mm
Packaging unit	1
Article number	40.104.60
EAN code	



Einhell Germany AG

**SUPER**  
**AIR +25%**  
**POWER 10 bar**

**THE COMPRESSOR SERIES  
WITH +25% MORE POWER.**

10 bar tank pressure instead of the usual 8 bar makes the Einhell compressor series a force to be reckoned with for all those day-to-day jobs. Where standard compressors reach their limits, Einhell Super Air Power compressors only just begin to show what they are really made of. The benefits for you are an unimagined diversity of uses and compressed air accessories!

**WITH SUPER AIR POWER  
YOU WORK:**

More efficiently

More quickly

With greater versatility

**+25%**  
more energy



Oil lubrication contributes to long life




Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw

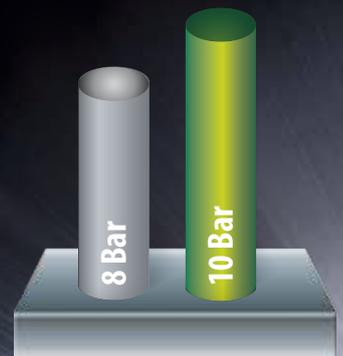

COMPRESSOR  
**TE-AC 270/24/10**



Mains voltage	230 V ~ 50 Hz
Rating	1800 W S1
Intake capacity	270 l/min
Output	at 0 bar: 140 l/min at 4 bar: 127 l/min at 7 bar: 100 l/min
Tank capacity	24 l
Speed	2850 min <sup>-1</sup>
Pump speed	2850 min <sup>-1</sup>
Operating pressure	max. 10 bar
Number of cylinders	1
Net weight   gross weight	27.0 kg   29.5 kg
Packing dimensions	630 x 275 x 635 mm
Packaging unit	1
Article number	40.104.50
EAN code	

COMPRESSOR  
**TE-AC 270/50/10**



Mains voltage	230 V ~ 50 Hz
Rating	1800 W S1
Intake capacity	270 l/min
Output	at 0 bar: 140 l/min at 4 bar: 127 l/min at 7 bar: 100 l/min
Tank capacity	50 l
Speed	2850 min <sup>-1</sup>
Pump speed	2850 min <sup>-1</sup>
Operating pressure	max. 10 bar
Number of cylinders	1
Net weight   gross weight	33.7 kg   36.8 kg
Packing dimensions	780 x 325 x 718 mm
Packaging unit	1
Article number	40.104.40
EAN code	



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Big wheels and holder for easy transport



Large, easy-to-read pressure indicators



Big wheels and holder for easy transport



Large, easy-to-read pressure indicators

COMPRESSOR  
**TE-AC 400/50/10**



Mains voltage	230 V ~ 50 Hz
Rating	2600 W S2 30 min
Intake capacity	400 l/min
Output	at 0 bar: 241 l/min at 4 bar: 208 l/min at 7 bar: 175 l/min
Tank capacity	50 l
Speed	2850 min <sup>-1</sup>
Pump speed	2850 min <sup>-1</sup>
Operating pressure	max. 10 bar
Number of cylinders	2
Net weight   gross weight	40.2 kg   43.8 kg
Packing dimensions	800 x 360 x 730 mm
Packaging unit	1
Article number	40.104.70
EAN code	



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Big wheels and holder for easy transport



High air delivery rate thanks to a double compressor unit



Einhell Germany AG

## MORE OPTIONS, MORE PERSPECTIVE!

The graphs on the compressor tanks indicate the many different uses of the relevant device.



### BLOW-OUT PISTOLS

For easy and fast cleaning of work areas. Short and long blow-out pistols.



### TIRE INFLATION METERS

For filling tires of all kinds. Tire inflation meter also available in professional version.



### SPRAY GUNS AND UNDERSEAL SPRAY GUNS

Flexible in use – including for underseal applications.



### PAINT SPRAY GUNS

The quick and easy solution for a wide variety of painting jobs.



### RATCHET AND HAMMER SCREWDRIVER

With the ratchet and hammer screwdriver you'll release and fasten practically any screw.



### ROD GRINDER

For carrying out grinding jobs of all types with ease.



### STAPLER & NAILER SET

With staples and nails of many different sizes.



### ECCENTRIC GRINDER/SANDER

For the effortless grinding/sanding of even large areas.



### CHISEL HAMMER SET

Together with the Super Air Power provided by Einhell compressors you can tackle even small demolition jobs.



### JET GUN & SUCTION-FEED SPRAY PISTOL

Enables applications like sandblasting.

COMPRESSOR  
**TE-AC 300/50/10**



Mains voltage	230 V ~ 50 Hz
Rating	2000 W S3 25%
Intake capacity	300 l / min
Output	at 0 bar: 243 l/min at 4 bar: 217 l/min at 7 bar: 184 l/min
Tank capacity	50 l
Speed	2850 min <sup>-1</sup>
Pump speed	1300 min <sup>-1</sup>
Operating pressure	max. 10 bar
Number of cylinders	2
Net weight   gross weight	49.3 kg   54.8 kg
Packing dimensions	850 x 365 x 750 mm
Packaging unit	1
Article number	40.101.81
EAN code	

COMPRESSOR  
**TE-AC 480/100/10 D**



Mains voltage	400 V 3~ 50 Hz three-phase current
Rating	3000 W S1
Intake capacity	480 l / min
Output	at 0 bar: 389 l/min at 4 bar: 348 l/min at 7 bar: 308 l/min
Tank capacity	100 l
Speed	2850 min <sup>-1</sup>
Pump speed	1310 min <sup>-1</sup>
Operating pressure	max. 10 bar
Number of cylinders	2
Net weight   gross weight	72.1 kg   81.1 kg
Packing dimensions	1005 x 412 x 890 mm
Packaging unit	1
Article number	40.102.31
EAN code	



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Belt drive for low-noise operation and high efficiency



High air delivery rate thanks to a double compressor unit



Belt drive for low-noise operation and high efficiency



Large air supply for many different applications

**BLOW-OUT PISTOL**  
SHORT



Art. No. 41.331.00  
PU 1  
EAN code



**BLOW-OUT PISTOL**  
LONG



Art. No. 41.331.02  
PU 1  
EAN code



**TIRE PRESSURE GAUGE**



Art. No. 41.370.00  
PU 1  
EAN code



**TIRE PRESSURE GAUGE**  
PROFI



Art. No. 41.331.10  
PU 1  
EAN code



**PAINT SPRAY GUN**  
CUP



Art. No. 41.330.00  
PU 1  
EAN code



**PAINT SPRAY GUN**  
PROFI, CUP



Art. No. 41.330.30  
PU 1  
EAN code



**PAINT SPRAY GUN**  
SUCTION-FEED CAN



Art. No. 41.329.00  
PU 1  
EAN code



**SPRAY GUN**  
SUCTION-FEED CAN



Art. No. 41.332.00  
PU 1  
EAN code



**COMPRESSED AIR KIT**  
3 pieces



Art. No. 41.327.41  
PU 1  
EAN code



**PROFI COMPRESSED AIR KIT**  
5 pieces



Art. No. 41.327.20  
PU 1  
EAN code



**JET GUN**  
SUCTION-FEED CAN



Art. No. 41.333.00  
PU 1  
EAN code



**SUCTION-FEED SPRAY PISTOL**  
DSP 226



Art. No. 41.334.00  
PU 1  
EAN code



**UNDERSEAL GUN**



Art. No. 41.335.01  
PU 1  
EAN code



**IMPACT SCREWDRIVER SET**  
DSS 260/2



Art. No. 41.389.10  
PU 1  
EAN code



**RATCHET  
SCREWDRIVER KIT**

DRS 200/2



Art. No. 41.391.70  
PU 1  
EAN code



**CHISEL HAMMER  
KIT**

DMH 250/2



Art. No. 41.390.08  
PU 1  
EAN code



**PIN GRINDER KIT**

DSL 250/2



Art. No. 41.385.20  
PU 1  
EAN code



**COMPRESSED AIR  
ECCENTRIC SANDER**

DSE 125



Art. No. 41.333.25  
PU 1  
EAN code



**STAPLER/NAILER  
KIT**

DTA 25/2




Art. No. 41.377.55  
PU 1  
EAN code



**NAILS**

25 mm, 3000 pieces



Art. No. 41.378.71  
PU 1  
EAN code



**NAILS**

40 mm, 3000 pieces



Art. No. 41.378.72  
PU 1  
EAN code



**NAILS**

50 mm, 3000 pieces



Art. No. 41.378.73  
PU 1  
EAN code



**STAPLES**

5 x 13 mm, 3000 pieces



Art. No. 41.378.50  
PU 1  
EAN code



**STAPLES**

5 x 16 mm, 3000 pieces



Art. No. 41.378.55  
PU 1  
EAN code



**STAPLES**

5 x 25 mm, 3000 pieces



Art. No. 41.378.60  
PU 1  
EAN code



**STAPLES**

5 x 40 mm, 3000 pieces



Art. No. 41.378.61  
PU 1  
EAN code



**SPECIAL  
COMPRESSED AIR  
OIL**

500 ml



Art. No. 41.383.10  
PU 1  
EAN code



**MINI OILER**

R 1/4" internal thread  
R 1/4" external thread



Art. No. 41.350.02  
PU 1  
EAN code



### FILTER + PRESSURE REDUCER

incl. threaded nipple and  
quick-lock coupling R1/4"

Art. No. 41.342.00

PU 1

EAN code



### FILTER + PRESSURE REDUCER

incl. threaded nipple and  
quick-lock coupling R3/8"

Art. No. 41.341.00

PU 1

EAN code



### COMBINATION CONDITIONING UNIT

incl. threaded nipple and  
quick-lock coupling R1/4"

Art. No. 41.350.01

PU 1

EAN code



### COMBINATION CONDITIONING UNIT

incl. threaded nipple and  
quick-lock coupling R3/8"

Art. No. 41.350.00

PU 1

EAN code



### SPIRAL HOSE

4 m, Ø 6 mm

Art. No. 41.394.10

PU 1

EAN code



### SPIRAL HOSE

8 m, Ø 6 mm

Art. No. 41.394.20

PU 1

EAN code



### FABRIC HOSE

10 m, Ø 6 mm

Art. No. 41.381.00

PU 1

EAN code



### FABRIC HOSE

15 m, Ø 6 mm

Art. No. 41.382.00

PU 1

EAN code



### FABRIC HOSE

15 m, Ø 9 mm

Art. No. 41.382.10

PU 1

EAN code



### AUTOMATIC HOSE ROLLER

9 m + 1 m

Art. No. 41.380.00

PU 1

EAN code



### QUICK-LOCK COUPLING

R 1/4" external thread

Art. No. 41.392.07

PU 1

EAN code



### QUICK-LOCK COUPLING

R 3/8" external thread

Art. No. 41.392.08

PU 1

EAN code



### QUICK-LOCK COUPLING

R 1/2" external thread

Art. No. 41.392.09

PU 1

EAN code



### QUICK-LOCK COUPLING

R 1/4" internal thread

Art. No. 41.392.06

PU 1

EAN code



**QUICK-LOCK  
COUPLING**

R 3/8" internal thread



Art. No. 41.392.05  
PU 1  
EAN code



**QUICK-LOCK  
COUPLING**

R 1/2" internal thread



Art. No. 41.392.10  
PU 1  
EAN code



**QUICK-LOCK  
COUPLING**

Ø 6 mm



Art. No. 41.393.01  
PU 1  
EAN code



**QUICK-LOCK  
COUPLING**

Ø 9 mm



Art. No. 41.393.02  
PU 1  
EAN code



**HOSE CONNECTOR  
KIT**

Ø 6 mm



Art. No. 41.395.00  
PU 1  
EAN code



**GROMMET**

Ø 6 mm



Art. No. 41.396.60  
PU 1  
EAN code



**GROMMET**

Ø 9 mm



Art. No. 41.396.61  
PU 1  
EAN code



**HOSE  
CONNECTION  
TUBE**

Ø 6 mm



Art. No. 41.393.10  
PU 1  
EAN code



**HOSE  
CONNECTION  
TUBE**

Ø 9 mm



Art. No. 41.393.20  
PU 1  
EAN code



**HOSE NOZZLE**

Ø 6 mm  
R 1/4" external thread



Art. No. 41.396.65  
PU 1  
EAN code



**HOSE NOZZLE**

Ø 6 mm  
R 3/8" external thread



Art. No. 41.396.66  
PU 1  
EAN code



**THREADED  
NIPPLE**

R 1/4" external thread



Art. No. 41.396.55  
PU 1  
EAN code



**THREADED  
NIPPLE**

R 3/8" external thread



Art. No. 41.396.50  
PU 1  
EAN code



**THREADED  
NIPPLE**

R 1/4" internal thread



Art. No. 41.396.40  
PU 1  
EAN code



### THREADED NIPPLE

R 3/8" internal thread



Art. No. 41.396.45  
PU 1  
EAN code



### DOUBLE NIPPLE

R 1/4" external thread



Art. No. 41.396.20  
PU 1  
EAN code



### DOUBLE NIPPLE

R 3/8" external thread



Art. No. 41.396.10  
PU 1  
EAN code



### REDUCTION

R 3/8" external thread,  
R 1/4" external thread



Art. No. 41.396.30  
PU 1  
EAN code



### REDUCTION

R 1/2" external thread,  
R 3/8" internal thread



Art. No. 41.396.05  
PU 1  
EAN code



### REDUCTION

R 3/8" external thread,  
R 1/4" internal thread



Art. No. 41.396.00  
PU 1  
EAN code



### DISTRIBUTOR

2 quick-lock couplings,  
R 3/8" internal thread



Art. No. 41.396.80  
PU 1  
EAN code



### CLIP KIT

5 pieces, 8 – 12 mm



Art. No. 41.396.70  
PU 1  
EAN code



### INFLATION ADAPTER KIT

8 pieces



Art. No. 41.396.95  
PU 1  
EAN code



### MICHELIN-NIPPLE

NS 6 mm



Art. No. 41.393.30  
PU 1  
EAN code



**E** TILE /  
STONE CUTTING  
**Machines that cut  
stones and prices  
down to size.**



TILE CUTTING MACHINE  
**TH-TC 618**



Mains voltage	230 V ~ 50 Hz
Rating	600 W S2 10 min
Speed	2950 min <sup>-1</sup>
Max. cutting thickness	35 mm (90°), 22 mm (45°)
Diamond cutting wheel	Ø 180 x Ø 25.4 mm
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	330 x 360 mm
Net weight   gross weight	8.3 kg   9.1 kg
Packing dimensions	385 x 350 x 195 mm
Packaging unit	1
Article number	43.011.80
EAN code	 4 006825 590685



Table adjustment (tilt)



Precise cuts thanks to parallel stop



Dust-free operation thanks to wet cutting



Cable rewind

Note: For safe handling of the products please refer to the instructions in the operating manual.

TILE CUTTING MACHINE  
**RT-TC 430 U**  
WITH BASE FRAME

TILE CUTTING MACHINE  
**RT-TC 520 U**  
WITH BASE FRAME



Mains voltage	230 V ~ 50 Hz
Rating	600 W S1
Speed	3000 min <sup>-1</sup>
Max. cutting thickness	25 mm (90°), 17 mm (45°)
Max. cutting length	430 mm
Diamond cutting wheel	Ø 180 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	500 x 385 mm
Net weight   gross weight	27.3 kg   29.8 kg
Packing dimensions	775 x 485 x 335 mm
Packaging unit	1
Article number	43.012.62
EAN code	 4 006825 540178

Mains voltage	230 V ~ 50 Hz
Rating	800 W S1
Speed	3000 min <sup>-1</sup>
Max. cutting thickness	30 mm (90°), 25 mm (45°)
Max. cutting length	520 mm
Diamond cutting wheel	Ø 200 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	570 x 385 mm
Net weight   gross weight	28.7 kg   31.6 kg
Packing dimensions	890 x 490 x 350 mm
Packaging unit	1
Article number	43.012.71
EAN code	 4 006825 551914



Precisely adjustable stop




Pivot-mounted motor guide



Laser for precise cutting



Pivot-mounted motor guide



Water collection tank with coolant pump



Turbo diamond cutting wheel



Water collection tank with coolant pump



Removable laser

TILE CUTTING MACHINE

**TE-TC 620 U**

WITH RETRACTABLE BASE FRAME



DE: price/performance "Very Good"  
 Heilmwerker Preis 1,4



Mains voltage	230 V ~ 50 Hz
Rating	900 W S2 30 min
Speed	2950 min <sup>-1</sup>
Max. cutting thickness	30 mm (90°), 25 mm (45°)
Max. cutting length	620 mm
Diamond cutting wheel	Ø 200 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	610 x 325 mm
Net weight   gross weight	35.8 kg   38.6 kg
Packing dimensions	1013 x 455 x 460 mm
Packaging unit	1
Article number	43.012.95
EAN code	


STONE CUTTING MACHINE

**RT-SC 570 L**

WITH BASE FRAME



Mains voltage	230 V ~ 50 Hz
Rating	1500 W S2 20 min
Speed	3000 min <sup>-1</sup>
Max. cutting thickness	60 mm (90°), 48 mm (45°)
Max. cutting length	570 mm
Diamond cutting wheel	Ø 250 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	630 x 450 mm
Net weight   gross weight	47.3 kg   51.0 kg
Packing dimensions	1020 x 580 x 445 mm
Packaging unit	1
Article number	43.014.44
EAN code	



Folding feet



1 height-adjustable foot



Plunge cutting function



Feet can be mounted without tools



Easy transport



Pump guard cage



Angle stop



Removable laser

STONE CUTTING MACHINE

# RT-SC 920 L

WITH BASE FRAME



Mains voltage	230 V ~ 50 Hz
Rating	2200 W S2 20 min
Speed	3000 min <sup>-1</sup>
Max. cutting thickness	70 mm (90°), 55 mm (45°)
Max. cutting length	920 mm
Diamond cutting wheel	Ø 300 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	920 x 550 mm
Net weight   gross weight	65.1 kg   71.6 kg
Packing dimensions	1450 x 705 x 490 mm
Packaging unit	1
Article number	43.014.32
EAN code	



Plunge cutting function



Feet can be mounted without tools



Angle stop



Removable laser



Einhell Germany AG

## DIAMOND CUTTING WHEEL

for TH-TC 618, RT-TC 430 U  
Ø 180 x Ø 25.4 mm



Art. No. 43.011.70

PU 1

EAN code



4 006825 432015

## TURBO DIAMOND CUTTING WHEEL

for RT-TC 430 U, TH-TC 618  
Ø 180 x Ø 25.4 mm



Art. No. 43.011.76

PU 1

EAN code



4 006825 505481

## TURBO DIAMOND CUTTING WHEEL

for RT-TC 520 U, TE-TC 620 U  
Ø 200 x Ø 25.4 mm



Art. No. 43.011.75

PU 1

EAN code



4 006825 434361

## TURBO DIAMOND CUTTING WHEEL

for RT-SC 570 L  
Ø 250 x Ø 25.4 mm



Art. No. 43.011.77

PU 1

EAN code



4 006825 506723

## TURBO DIAMOND CUTTING WHEEL

for RT-SC 920 L  
Ø 300 x Ø 25.4 mm



Art. No. 43.011.78

PU 1

EAN code



4 006825 541649

**Brand quality at the best price -  
that makes you want to keep on working.**



**Christoph Gaßner**  
(Marketing Management,  
Einhell Germany AG)

Wherever my angle grinder meets its limits, the Einhell cutting machine is the ideal device. It goes through even large profiles like a knife through butter. Swiveling machine vise with rapid adjustment, suitable for dry cutting, and so much more. It didn't take long to build the base for my new smoker. And my friends' eyes when they saw the grill were bigger than the T-bone steaks.





BENCH GRINDER  
**TC-BG 200**

**NEW!**



Mains voltage	230 V ~ 50 Hz
Rating	400 W S2 30 min
Speed	2950 min <sup>-1</sup>
Grinding wheel	Ø 200 x 25 x Ø 32 mm

Net weight   gross weight	12.9 kg   13.3 kg
Packing dimensions	430 x 270 x 290 mm
Packaging unit	1
Article number	44.128.20
EAN code	

WET-DRY GRINDER  
**TC-WD 150/200**

**NEW!**



Mains voltage	230 V ~ 50 Hz
Rating	250 W S2 30 min
Speed	Dry: 2950 min <sup>-1</sup> Wet: 134 min <sup>-1</sup>
Grinding wheel	Trocken: Ø 150 x 20 mm, Nass: Ø 200 x 40 mm

Net weight   gross weight	9.9 kg   11.2 kg
Packing dimensions	530 x 320 x 300 mm
Packaging unit	1
Article number	44.172.40
EAN code	



Rubber feet ensure safe, low-vibration stability



Adjustable spark guard window



Rubber feet ensure safe, low-vibration stability



Robust and compact metal structure for a long service life



Long service life thanks to robust compact metal construction



Includes coarse and fine grinding/sanding wheel (K36/K60)



Corrosion-resistant water tank



Includes coarse and fine grinding/sanding wheel (K36/K60)



METAL CUTTING SAW  
**TH-MC 355**




Mains voltage	230 V ~ 50 Hz
Rating	2000 W
Cutting disc	Ø 355 x Ø 25.4 x 3.2 mm
Speed	3000 min <sup>-1</sup>
Mitre cut	-30° to +45°
Saw width max. (90°)	quadrate 170 x 70 mm round 100 mm
Clamping range	230 mm
Table size	460 x 260 mm
Net weight   gross weight	19.0   19.6 kg
Packing dimensions	600 x 340 x 420 mm
Packaging unit	1
Article number	45.031.40
EAN code	



High-torque motor



Safe and user-friendly fastening  
with quick-adjust facility

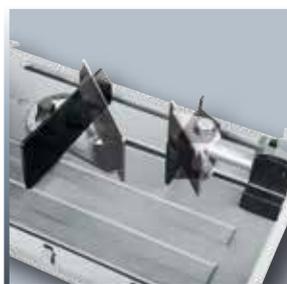

Precise mitre cuts



For mobile use



Einhell Germany AG

**FINE GRINDING/  
SANDING WHEEL  
(60)**

for TH-US 240, TC-WD 150/200  
Ø 150 x Ø 12.7 x 20 mm



Art. No. 44.125.12  
PU 1  
EAN code



**COARSE GRINDING/  
SANDING WHEEL  
(36)**

for TH-US 240, TC-WD 150/200  
Ø 150 x Ø 12.7 x 20 mm



Art. No. 44.125.13  
PU 1  
EAN code



**GRINDING/  
SANDING BELT SET**

for TH-US 240  
50 x 686 mm, 5 pieces




Art. No. 44.198.09  
PU 1  
EAN code



Further accessories from



www.kwb.eu



## Einhell Germany AG

**We're always here to help – and that's a promise!**  
Is there anything you'd like to ask us about our products?  
Would you like to order a part?  
Your product isn't working as it should?

**We're at your service!**  
We'll get you some help – fast and without any fuss.



**ISC GmbH, Eschenstr. 6,  
94405 Landau/Isar, Deutschland**



**+ 49 (0) 9951 959 2000**



(Landline charge 14 cent/min.)  
(Cell phone charge 42 cent/min.)

**+ 49 (0) 1805 835 830**



**www isc-gmbh.info**



**info@isc-gmbh.info**

Einhell Germany AG  
Wiesenweg 22  
94405 Landau/Isar  
Germany

Subject to technical  
modifications and errors

www.einhell.com  
info@einhell.com

Item no. 110168  
As of: 12.2014

© 2014 Einhell Germany AG

# Einhell